BLODGETT®

SB Series

Refrigerator Base with Self-Contained Condenser

Model 20072SB

OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- ❑ Cool pan drop ins
- ❑ Casters (in lieu of legs)
- ❑ Open frame base with caster

Project _____

Item No. _____

Quantity _____

- ❑ Model 20036SB (36” wide with two 18” drawers)
- ❑ Model 20048SB (48” wide with two 27” drawers)
- ❑ Model 20060SB (60” wide with two 31” drawers)
- ❑ Model 20072SB (72” wide with four 27” drawers)
- ❑ Model 20084SB (84” wide with four 31” drawers)
- ❑ Model 20096SB (96” wide with two 18” drawers and four 27” drawers)
- ❑ Model 20108SB (108” wide with six 27” drawers)
- ❑ Model 20120SB (120” wide with two 18” drawers and four 27” drawers)

The Blodgett refrigerator bases support modular sectional range tops. They keep food refrigerated until the moment it is ready to be cooked. Battery-design assistance is available!

Blodgett can often accommodate special or custom requirements. Contact your Blodgett representative.

CAPACITY

Unit capacity

■ Model 20036SB	2 pans
■ Model 20048SB	4 pans
■ Model 20060SB	4 pans
■ Model 20072SB	8 pans
■ Model 20084SB	8 pans
■ Model 20096SB	10 pans
■ Model 20108SB	12 pans
■ Model 20120SB	12 pans

Drawer capacity

- ■ Each 18” drawer holds one pan front to back
- ■ Each 27” wide drawer holds two pans front to back
- ■ Each 31” wide drawer holds two pans side by side

STANDARD FEATURES

- ■ Self closing heavy duty drawers slide on stainless steel rollers
- ■ Drawers hold standard sized (12” x 20” x 4”) pans - not included
- ■ CFC-free refrigeration system ahs an expansion valve for rapid temperature recovery
- ■ Foamed-in-place CFC-free polyurethane insulation provides highest insulation factor available
- ■ Self-closing drawers have easy-to-grasp handles
- ■ Rubber magnetic door gaskets provide a positive seal and easy cleaning
- ■ Stainless steel top, front, sides, back, drawers and interior cavity
- ■ 6” adjustable stainless steel legs
- ■ Interior corners are coved for easy cleaning
- ■ Condensate evaporator
- ■ Adjustable thermostat with external dial thermometer
- ■ Mullion coils are coated to resist corrosion and provide maximum air flow for even cooling
- ■ Operates on 120 volt, single phase, 50/60 Hz AC power
- ■ Warranty: two year parts and labor from date of purchase

REFRIGERATOR W/SELF CONTAINED CONDENSER

BLODGETT
www.blodgett.com
1100 Old Honeycutt Road Fuquay-Varina, NC 27526 USA
Phone: (877) 255-3976 • Fax: (866) 644-1354

REFRIGERATOR W/SELF-CONTAINED CONDENSER

APPROVAL/STAMP





DIMENSIONS ARE IN INCHES (MM).

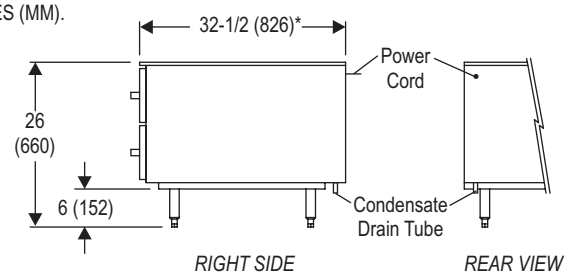

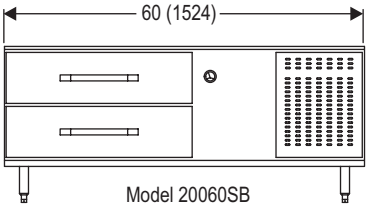

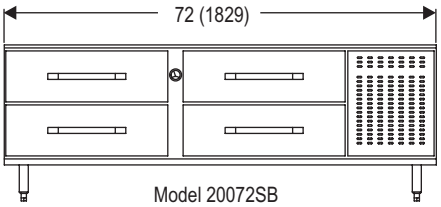

Minimum clearance on all sides is 3" (76mm). However, modular range-top sections can be mounted directly on top using an insulated base adapter. Also, these refrigerated bases can be part of a sectional battery provided that the adjoining base sections are insulated (or do not produce heat).

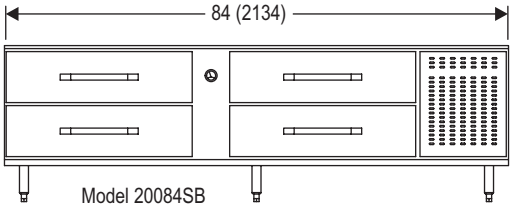

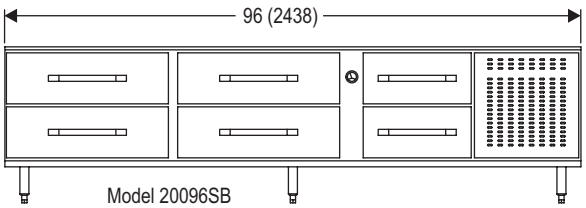

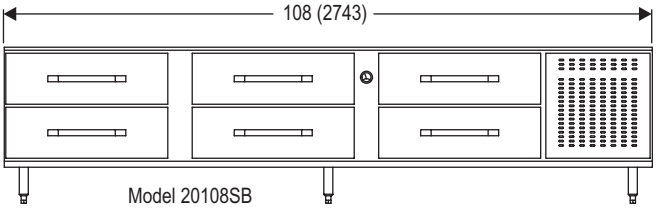

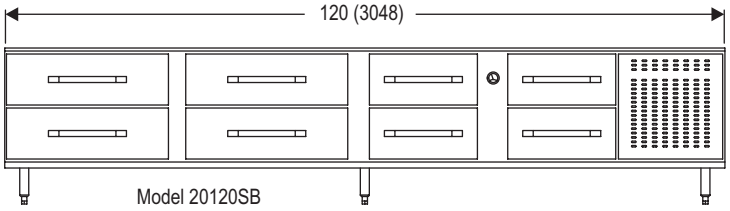

SHORT FORM SPECIFICATIONS

The item shall be refrigerator base-section for a sectional range. Unit shall a have 430 stainless steel #3 polish top, front, sides, back, drawers and interior cavity. The item shall have drawers that hold standard sized (12" x 20" x 4") pans (not included). The drawer assemblies shall be removable for cleaning. The unit shall include a 6' (152cm) power cord with grounded plug to receive 50 or 60hz, single phase, 120VAC electric power. The unit shall have a self contained condenser. The unit shall be at most 32-1/2" deep and shall be 26" high including adjustable 6" legs. Refrigerant is CFC-free R-404a. Provide options and accessories as indicated.

TECHNICAL INFORMATION

Model	Width	Cooled Volume ft³ (m³)	Cooling Capacity BTU/hr	Electricity 120V amps	Recommended Compressor
20036SB	36"	4 (0.11)	1450	5	1/4 H.P.
20048SB	48"	6.7 (0.19)	1670	5.5	1/4 H.P.
20060SB	60"	10 (0.28)	1802	6	1/4 H.P.
20072SB	72"	13 (0.37)	1875	6.5	1/3 H.P.
20084SB	84"	16 (0.45)	1920	7	1/3 H.P.
20096SB	96"	18 (0.51)	1955	11	1/2 H.P.
20108SB	108"	22 (0.62)	1955	11	1/2 H.P.
20120SB	120"	25.5 (0.72)	2000	12	1/2 H.P.

NOTE: *The company reserves the right to make substitutions of components without prior notice*

SHIPPING INFORMATION

Approximate weight:

20036SB	340 lbs (154 kg)
20048SB	410 lbs (186 kg)
20060SB	550 lbs (249 kg)
20072SB	650 lbs (295 kg)
20084SB	745 lbs (338 kg)
20096SB	855 lbs (388 kg)
20108SB	960 lbs (435 kg)
20120SB	1075 lbs (488 kg)

OTHER TECHNICAL INFORMATION

Avoid locating where the temperature will drop below 55°F (13°C) or rise above 90°F (32°C).

Check local codes for fire and sanitary regulations.

BLODGETT
www.blodgett.com
1100 Old Honeycutt Road Fuquay-Varina, NC 27526 USA • Phone: (877) 255-3976 • Fax: (866) 644-1354